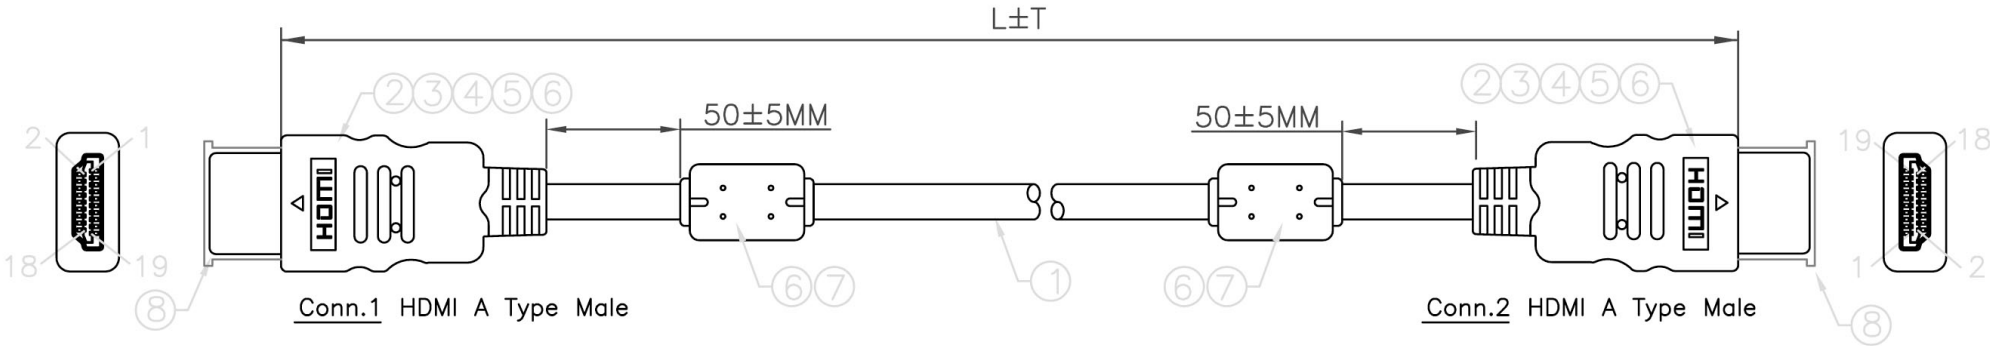

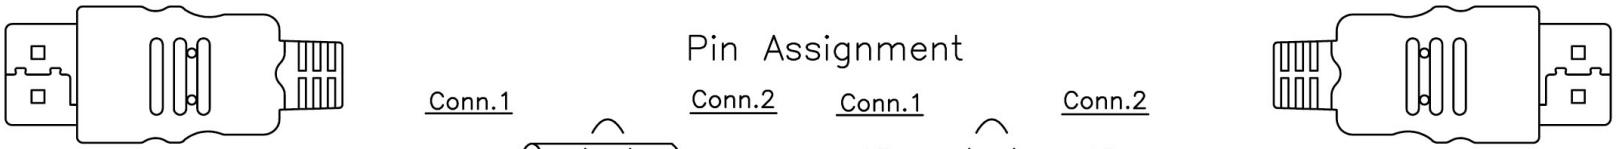

Pin Assignment

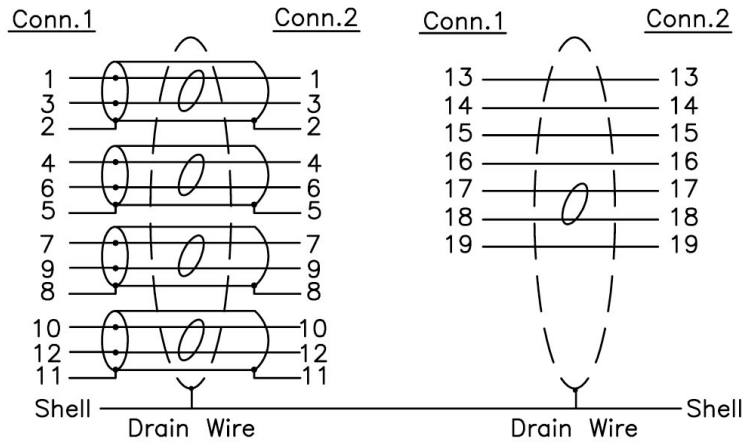

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: R ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:100V DC/10ms

See Table

Part No	Part No	Length	Insulation
CL460-50	KLL-2805-2F-50	500±20mm	1 ohm
CL460	KLL-2805-2F	500±20mm	1 ohm
CL461	KLL-2815-2F	1500±30mm	2 ohm
CL463	KLL-2830-2F	3000±40mm	2 ohm
CL465	KLL-2850-2F	5000±60mm	2 ohm

NO.	ITEM	DESCRIPTION	Q'TY	UNIT
⑧	A6-0000015	HDMI Transparent Dust Cover	2	pcs
⑦	A10-R041032	Ferrite Core:RH28.5*17.5*7.5	2	pcs
⑥	A5-R047001	Outside Molding:45P PVC PMS:Black	35	g
⑤	A5-R047011	Inside Molding:PE	3	g
④	A10-R075133	H.S.T ø1.5*16mm Black	2	pcs
③	A10-R075137	H.S.T ø2.0*10mm Black	8	pcs
②	A2-R020044	HDMI 19P Male Shell Gold Plated,Insulation:Black	2	pcs
①	A4-R001XXX	HDMI 1.3 Cable: UL20276 (28AWG*1PR+D.W.+Al/my)*4C+28AWG*1PR +28AWG*5C+Al/my+D.W.+Braid+Jacket OD=7.3MM Color:Black	1	pcs

REV.	DESCRIPTION	DATE

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	Ken	CUSTOMER :	
CHECK BY		CUSTOMER NO.:	
APPD BY		SCALE: NONE	DRAWING NO.: KLL-30 REV. A
		UNIT: MM	
		DATE: 08.09.12	1/1

TITLE: HDMI 28AWG 10# Gold Plated